


EXPLANATION OF PART NUMBERS 產品編碼規則

For Conductive Polymer Hybrid Aluminum Electrolytic Capacitors 適用於導電性高分子混合型鋁電解電容器

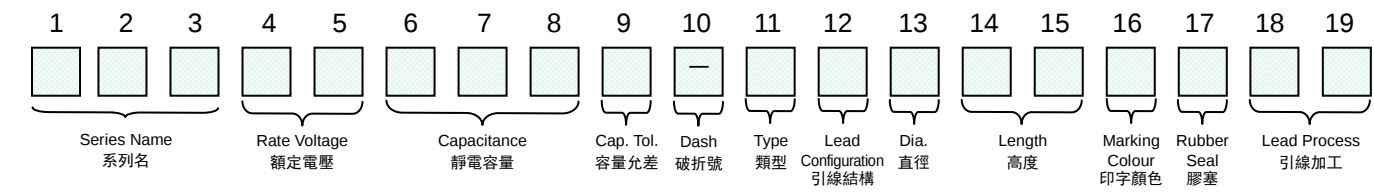

(1~3)		(4, 5)		(6~8)		(9)		(11)		(13)		(14, 15)	
Series 系列	Voltage (W.V.) 電壓	Code 代碼	Capacitance (μF) 靜電容量	Code 代碼	Cap. Tolerance (%) 容量允差	Code 代碼	Type 類型	Code 代碼	Diameter (∅) 直徑	Code 代碼	Length (mm) 高度	Code 代碼	
HMB	16	1C	22	220	+20	M	Chip 貼片	C	6.3	E	6	06	
HMR	20	1D	33	330	-20		Radial 引線	R	8	F	6.7	67	
HPB	25	1E	39	390			Radial Taping 引線編帶	T	10	G	7	07	
HPR	35	1V	47	470							7.7	77	
	40	1G	56	560							8	08	
	50	1H	68	680							9	09	
	63	1J	82	820							10(10.5)	10	
	75	1T	100	101							10.2	1S	
	80	1K	150	151							11	11	
	85	1R	220	221							12(12.5)	12	
	100	2A	270	271									
			330	331									
			390	391									
			470	471									
			680	681									
			820	821									
			1000	102									
			1200	122									
			1500	152									

(12)		
Type 類型	Lead Configuration 引線結構	Code 代碼
Chip 貼片	Taping & Reel 編帶與卷盤	R
Radial 引線	Bulk 散裝	B
	Taping (Straight) 編帶（直腳）	S
	Lead Cutting 剪腳	C

(16)		(17)		(18, 19)	
Marking Colour 印字顏色	Code 代碼	Rubber Seal 膠塞	Code 代碼	Lead Process 引線加工	Code 代碼
Black print on the case top 鋁殼頂部黑字印刷	S	Flat 平台	P	Standard 標準	00
Navy Blue print on the case top 鋁殼頂部深藍字印刷	B	Stand-off 凸台	T	Lead length after cut is 3mm 剪腳腳長 3mm	30
Red print on the case top 鋁殼頂部紅字印刷	R			Lead length after cut is 4.5mm 剪腳腳長 4.5mm	45
				Lead length after cut is 5mm 剪腳腳長 5mm	50
				Lead length after cut is 7.5mm 剪腳腳長 7.5mm	75
				Lead length after cut is 10mm 剪腳腳長 10mm	1A
				Lead length after cut is 12mm 剪腳腳長 12mm	1B
				Lead length after cut is 13mm 剪腳腳長 13mm	1C
				Lead length after cut is 15mm 剪腳腳長 15mm	1D

● Note: The part number of Chip Type Conductive Polymer Hybrid Aluminum Electrolytic Capacitors is indicated with 1~15 digits.
● 注：貼片式導電性高分子混合型鋁電解電容器的產品編碼只需使用 1~15 位代碼。