


TAPING & PACKAGING SPECIFICATIONS 編帶與包裝標準

For Chip Type Capacitors 適用於貼片式電容器

Carrier Tape Dimensions 載帶尺寸


Ø4 ~ Ø10 (mm)

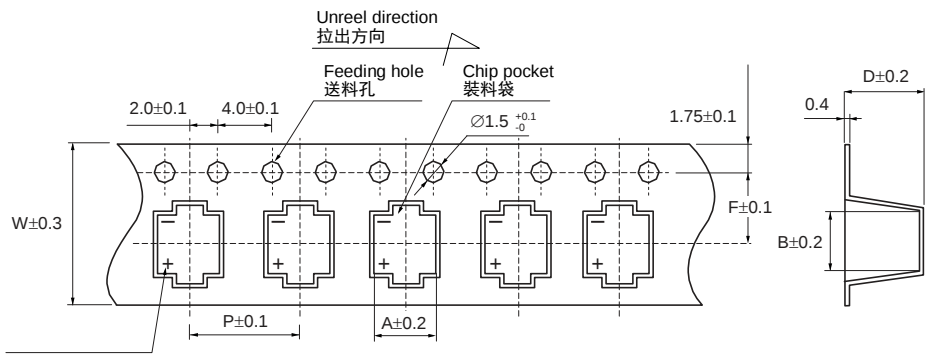

Dimension 尺寸表 (Unit: mm)

ØD × L	4×5.5	5×5.5/5.8/8/9	6.3×5.5/5.8/6.5	6.3×7.7/9/9.5	8×6/6.7/7	8×7.7/8/9	8×10/10.5/12	10×8/10/10.5	10×12/12.7/13
W	12.0	12.0	16.0	16.0	24.0	24.0	24.0	24.0	24.0
P	8.0	12.0	12.0	12.0	12.0	12.0	16.0	16.0	16.0
F	5.5	5.5	7.5	7.5	11.5	11.5	11.5	11.5	11.5
A	5.0	6.0	7.0	7.0	8.7	8.7	8.7	10.7	10.7
B	5.0	6.0	7.0	7.0	8.7	8.7	8.7	10.7	10.7
D	5.9/5.9	5.9/5.9/8.1/9.2	5.9/5.9/6.9	8.2/9.9/9.9	6.8/6.8/7.5	8.2/8.2/9.9	11.0/11.0/12.5	8.4/11.0/11.0	13.0/13.0/13.0


Reel Dimensions 卷盤尺寸

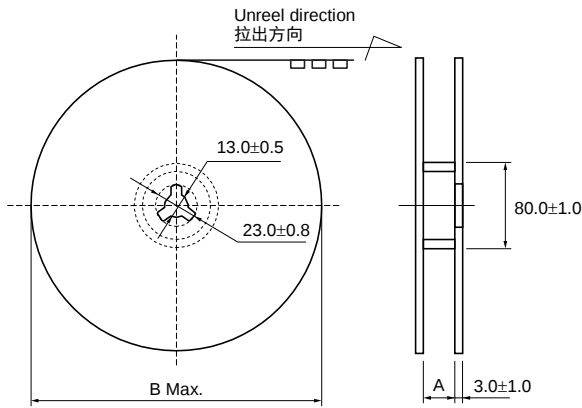

(Unit: mm)

ØD	Ø4	Ø5	Ø6.3	Ø8	Ø10
A±1.0	14	14	17	25.5	25.5
B (Max.)	382	382	382	382	382

Packaging Box 包裝箱

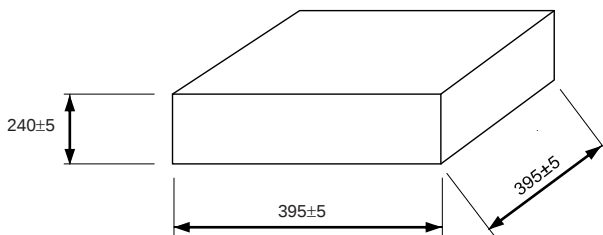

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.
注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

■ Packaging Quantity 包裝數量


□ For Chip Type Conductive Polymer Aluminum Solid Electrolytic Capacitors & Chip Type Conductive Polymer Hybrid Aluminum Electrolytic Capacitors
適用於貼片式導電性高分子固態鋁電解電容器及貼片式導電性高分子混合型鋁電解電容器

Case Size ∅D × L (mm) 尺寸	Quantity/Reel (pcs) 數量/卷 (個)	Reels/Box 卷盤/箱	Quantity/Carton (pcs) 數量/外箱 (個)
4 × 5.5	2,000*	12	24,000
5 × 5.5~8	1,000*	12	12,000
5 × 9	750*	12	9,000
6.3 × 5.5~8	1,000*	10	10,000
6.3 × 9~9.5	750*	10	7,500
8 × 6.7~10.5	750*	8	6,000
8 × 11~12	500*	8	4,000
10 × 8~13	450*	8	3,600

■ Taping Type (Ammo pack) 編帶品 (折疊式包裝)

□ For Conductive Polymer Aluminum Solid Electrolytic Capacitors & Conductive Polymer Hybrid Aluminum Electrolytic Capacitors
適用於導電性高分子固態鋁電解電容器及導電性高分子混合型鋁電解電容器

Type 類型	Diameter (mm) 直徑	In-box Size 內盒尺寸			Carton Box Size 外箱尺寸			Quantity/In-box (pcs) 數量/內盒 (個)	Quantity/Carton (pcs) 數量/外箱 (個)
		L (mm)	H (mm)	W (mm)	L (mm)	H (mm)	W (mm)		
	∅5	340	53	300	360	300	325	2,000*	10,000
	∅6.3	340	53	300	360	300	325	2,000*	10,000
	∅8	320	240	45	520	340	225	1,000*	10,000
	∅10	325	195	45	410	340	255	500*	4,000



■ Bulk Type 散裝品

□ For Conductive Polymer Aluminum Solid Electrolytic Capacitors & Conductive Polymer Hybrid Aluminum Electrolytic Capacitors
適用於導電性高分子固態鋁電解電容器及導電性高分子混合型鋁電解電容器

Type 類別	Case Size ∅D×L (mm) 尺寸	Vinyl Bag Quantity 膠袋數量		Small Box Quantity 內箱數量				Carton Box Quantity 外箱數量			Small Box Size 內箱尺寸			Carton Box Size 外箱尺寸		
		pcs/Bag 個/膠袋		Vinyl Bag/Small Box 膠袋/內箱		pcs/Small Box 個/內箱		Small Box/ Carton Box 內箱/外箱	pcs/Carton Box 個/外箱		L (mm)	H (mm)	W (mm)	L (mm)	H (mm)	W (mm)
		Long Lead 長腳	Lead Cutting/Forming 剪腳/成型	Long Lead 長腳	Lead Cutting/Forming 剪腳/成型	Long Lead 長腳	Lead Cutting/Forming 剪腳/成型		Long Lead 長腳	Lead Cutting/Forming 剪腳/成型						
Radial Lead Type 直插式	5 × 7~12	1,000*	1,000*	8	16	8,000	16,000	4	32,000	64,000	310	140	200	420	220	295
	6.3 × 6~9	1,000*	1,000*	8	8	8,000	8,000		32,000	32,000						
	6.3 × 10.5~12	500*	1,000*	8	8	4,000	8,000		16,000	32,000						
	8 × 7~9	500*	1,000*	8	8	4,000	8,000		16,000	32,000						
	8 × 11~16	500*	500*	8	8	4,000	4,000		16,000	16,000						
	10 × 8~13	250*	500*	8	8	2,000	4,000		8,000	16,000						
	10 × 16~21	200*	400*	8	8	1,600	3,200		6,400	12,800						

- There are some differences between actual package quantity and above list. Please confirm before you order.
- Please order by minimum package quantity.
- 以上包裝標準可能會與實際的包裝數量有所不同，請在訂購前確認。
- 請以最小包裝數量訂購。

* Minimum package quantity *最小包裝數量

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注: 以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

CAT.2019/V1