


LEAD TAPING & CUTTING SPECIFICATIONS 編帶與剪腳標準


□ For Radial Lead Type Conductive Polymer Aluminum Solid Electrolytic Capacitors 適用於插件式導電性高分子固態鋁電解電容器

■ Lead Taping for Automatic Insertion 自動插件用引線編帶模式

(Drawing A) 圖 A

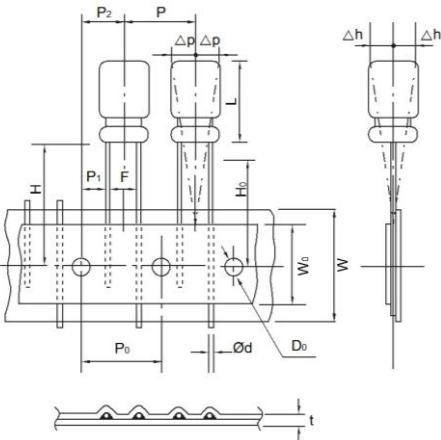

(Drawing B) 圖 B

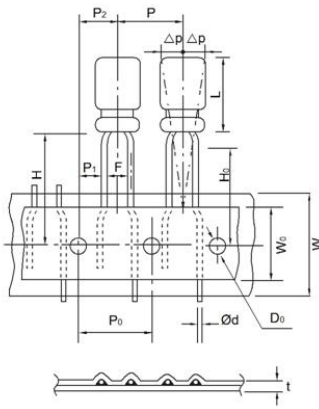

■ Dimensions 尺寸表

(Unit: mm)

Application To Drawing 對應外形圖			B <sup>(*)</sup>		A <sup>(*)</sup>			
Descriptions 內容	Symbol 符號	Tolerance 允差	Ø5		Ø6.3		Ø8	Ø10
Case Height 鋁殼高度	L	Note <sup>(*)2</sup>	7, 8, 9	11	6, 8, 9	10.5, 11.5	7, 8, 9, 11, 12	8, 10, 13
Lead Wire Diameter 引線直徑	Ød	±0.05	0.5	0.5	0.5, 0.6, 0.6	0.6	0.6	0.6
Body Pitch 電容器本體間距	P	±1.0	12.7		12.7		12.7	12.7
Feeding Hole Pitch 運送孔間距	P0	±0.2	12.7		12.7		12.7	12.7
Feeding Hole Center to Lead 運送孔至引線寬度	P1	±0.7	5.1		5.1		5.1	3.85
Feeding Hole Alignment 運送孔至電容器本體寬度	P2	±1.0	6.35		6.35		6.35	6.35
Lead Center Spacing 引線間距	F	+0.8 -0.2	2.5		2.5		3.5	5.0
Tape Width 紙帶寬度	W	±0.5	18.0		18.0		18.0	18.0
Adhesive Tape Width 熱熔膠帶寬度	W0	Min.	10.0		9.5		9.5	12.5
Length from Seating Plane 電容器本體至紙帶中心高度	H	±0.75	17.5	18.5	17.5		18.5	18.5
Lead Clinch Height 引線彎曲至運送孔高度	H0	±0.5	17.0		—		—	—
Feeding Hole Diameter 運送孔直徑	ØD0	±0.2	4.0		4.0		4.0	4.0
Total Tape Thickness 紙帶與膠帶的總厚度	t	±0.3	0.7		0.7		0.7	0.7
Body Inclination 電容器本體傾斜度	Δh	Max.	1.0		1.0		1.0	1.0
Body Inclination 電容器本體傾斜度	Δp	Max.	1.0		1.0		1.0	1.0
Taping Code 編帶代碼			TS		TS		TS	TS

(\*)1 For straight lead taping only, please consult with us before you order. 僅提供直腳編帶，請在訂購前向我們諮詢。

(\*)2 Please refer to the drawing of each series for tolerance. 請參閱相應系列外形圖的允許誤差。

■ Lead Cutting 引線剪腳

(Unit: mm)

Configurations 結構類型	Code 代碼	Case Diameter 鋁殼直徑	Shape 外形圖
Straight Cutting <sup>(*)1</sup> 直腳剪腳 <sup>(*)1</sup>	RC	Ø5~Ø10	<ul style="list-style-type: none"><li>● Lead diameter (Ød) and lead pitch (P) are subject to capacitor specifications.</li><li>● 引線的直徑(Ød)和腳距(P)請參閱各系列的詳細規格。</li></ul>

(\*)1 For straight lead cutting only, please consult with us before you order. 僅提供直腳剪腳，請在訂購前向我們諮詢。

**Note:** All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

CAT.2019/V1