


# MS Series

## CHIP TYPE, LONG LIFE

貼片式，長壽命品



- Operating with wide temperature range -55~+105°C  
適用於 -55~+105°C 的寬溫範圍
- Long life assurance  
長壽命
- Load life of 5000 hours  
負荷壽命 5000 小時
- RoHS & REACH compliant, Halogen-free  
符合 RoHS 與 REACH，無鹵



## □ SPECIFICATIONS 特性表


Items 項目	Characteristics 主要特性								
Operation Temperature Range 使用溫度範圍	-55 ~ +105°C								
Voltage Range 額定工作電壓範圍	4 ~ 50V								
Capacitance Range 靜電容量範圍	22 ~ 560μF								
Capacitance Tolerance 靜電容量允許偏差	±20% at 120Hz, 20°C								
Leakage Current 漏電流 (*1)	≤ Specified value (after 2 minutes application of rated voltage at 20°C). ≤ 規範值 (在 20°C 環境中施加額定工作電壓 2 分鐘後)。								
Dissipation Factor (tan δ) 損耗角正切	≤ Specified value at 120Hz, 20°C. ≤ 規範值 (在 20°C 120Hz 環境下)。								
ESR 阻抗值 (*2)	≤ Specified value at 100KHz, 20°C. ≤ 規範值 (在 20°C 100KHz 環境下)。								
Stability at Low Temperature 低溫特性	Measurement frequency 測試頻率: 100KHz <table border="1"> <tr> <td>Impedance Ratio 阻抗比</td> <td>Z(+105°C)/Z(20°C)</td> <td>≤1.25</td> </tr> <tr> <td>ZT/Z20 (max.)</td> <td>Z(-55°C)/Z(20°C)</td> <td>≤1.25</td> </tr> </table>			Impedance Ratio 阻抗比	Z(+105°C)/Z(20°C)	≤1.25	ZT/Z20 (max.)	Z(-55°C)/Z(20°C)	≤1.25
Impedance Ratio 阻抗比	Z(+105°C)/Z(20°C)	≤1.25							
ZT/Z20 (max.)	Z(-55°C)/Z(20°C)	≤1.25							
Damp Heat (Steady State) 穩態濕熱	When the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 60°C, 90% RH, they meet the characteristics listed below. 在 60°C 和相對濕度 90% 環境下施加額定工作電壓 1000 小時並冷卻至 20°C 後，電容器的特性符合下表的要求。								
Endurance 耐久性	Capacitance Change 靜電容量變化率	Within ±20% of initial value 為初始值的±20% 以內 (*3)							
	Dissipation Factor 損耗角正切	150% or less of initial specified value 不大於規範值的 150%							
	ESR 阻抗值 (*2)	150% or less of initial specified value 不大於規範值的 150%							
	Leakage Current 漏電流	Initial specified value or less 不大於規範值							
Resistance to Soldering Heat 耐焊接熱特性 (Please refer page 22 for soldering conditions) (焊接條件請參閱第 22 頁)	After 5000 hours application of the rated voltage at 105°C, they meet the characteristics listed below. 在 105°C 環境中施加額定工作電壓 5000 小時後，電容器的特性符合下表的要求。								
	Capacitance Change 靜電容量變化率	Within ±20% of initial value 為初始值的±20% 以內 (*3)							
	Dissipation Factor 損耗角正切	150% or less of initial specified value 不大於規範值的 150%							
	ESR 阻抗值 (*2)	150% or less of initial specified value 不大於規範值的 150%							
Marking 標識	Red print on the case top. 鋁殼頂部紅色字體印刷。								

(\*1) If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.  
如未能確定，在 105°C 環境下連續施加額定工作電壓 120 分鐘後測量漏電流。

(\*2) Should be measured at both of the terminal ends closest where the terminals protrude through the plastic platform.  
測試應為靠近突出底座的兩個端子的末端。

(\*3) The value before test of examination of resistance to soldering.  
焊接測試前的值。

## □ DRAWING 外形圖 (Unit: mm)

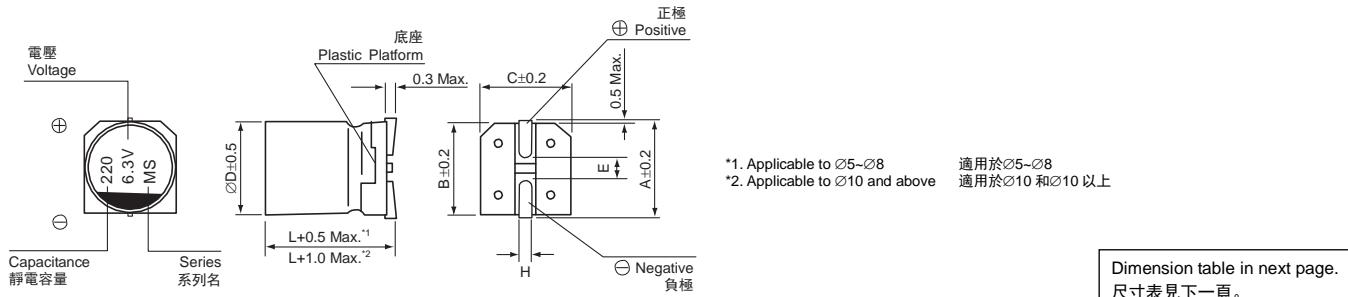

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

CAT.2019/V1

Dimension table in next page.  
尺寸表見下一页。

**MS Series****DIMENSIONS 尺寸表 (Unit: mm)**

<b>ØD × L</b>	<b>5 × 6</b>	<b>6.3 × 6</b>	<b>8 × 7</b>	<b>6.3 × 7</b>	<b>6.3 × 9.5</b>	<b>8 × 12</b>	<b>10 × 12</b>
A	6.0	7.3	9.0	7.3	7.3	8.0	10.0
B	5.3	6.6	8.3	6.6	6.6	8.3	10.3
C	5.3	6.6	8.3	6.6	6.6	8.3	10.3
E	1.6	2.1	3.2	2.1	2.1	3.2	4.6
L	6.0	6.0	7.0	7.0	9.5	12.0	12.0
H	0.5~0.8	0.5~0.8	0.8~1.1	0.5~0.8	0.5~0.8	0.8~1.1	0.8~1.1

**DIMENSIONS & STANDARD RATINGS 規格尺寸及標準參數**

Cap. 容量 (μF)	WV (V)	4 (0G)					6.3 (0J)					
		Parameter 參數	Case size ØDxL (mm) 尺寸	Dissipation factor (tan δ) 損耗角正切	Leakage current (μA) 漏電流	ESR (mΩ) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 105°C, 100KHz 紋波電流	Case size ØDxL (mm) 尺寸	Dissipation factor (tan δ) 損耗角正切	Leakage current (μA) 漏電流	ESR (mΩ) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 105°C, 100KHz 紋波電流
47	470							5 × 6	0.12	59.22	35	1600
100	101							5 × 6 (6.3 × 6)	0.12 (0.12)	126 (126)	25 (22)	2400 (2800)
120	121							6.3 × 6	0.12	151	22	2800
150	151	5 × 6	0.12	120	25	2200						
220	221							6.3 × 6 (8 × 7)	0.12 (0.12)	277 (277)	20 (22)	2800 (3200)
330	331	6.3 × 6 (8 × 7)	0.12 (0.12)	264 (264)	20 (22)	2800 (3200)						
390	391							8 × 7	0.12	491	22	3200
470	471							6.3 × 9.5	0.12	592	18	3200
560	561	8 × 7	0.12	448	18	3600						

Cap. 容量 (μF)	WV (V)	10 (1A)					16 (1C)					
		Parameter 參數	Case size ØDxL (mm) 尺寸	Dissipation factor (tan δ) 損耗角正切	Leakage current (μA) 漏電流	ESR (mΩ) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 105°C, 100KHz 紋波電流	Case size ØDxL (mm) 尺寸	Dissipation factor (tan δ) 損耗角正切	Leakage current (μA) 漏電流	ESR (mΩ) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 105°C, 100KHz 紋波電流
22	220							5 × 6	0.12	70.4	45	1100
33	330	5 × 6	0.12	66	40	1300						
39	390							5 × 6 (6.3 × 6)	0.12 (0.12)	125 (125)	35 (30)	2000 (2200)
56	560	6.3 × 6	0.12	112	27	2300						
68	680	5 × 6	0.12	136	30	2100	6.3 × 6	0.12	218	30	2200	
82	820							8 × 7	0.12	262	28	2800
120	121	6.3 × 6	0.12	240	27	2300	8 × 7	0.12	384	28	2800	
150	151	8 × 7	0.12	300	30	2600						
220	221	6.3 × 7	0.12	440	22	2800						
270	271	8 × 7	0.12	540	22	3200						

Cap. 容量 (μF)	WV (V)	25 (1E)					35 (1V)					
		Parameter 參數	Case size ØDxL (mm) 尺寸	Dissipation factor (tan δ) 損耗角正切	Leakage current (μA) 漏電流	ESR (mΩ) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 105°C, 100KHz 紋波電流	Case size ØDxL (mm) 尺寸	Dissipation factor (tan δ) 損耗角正切	Leakage current (μA) 漏電流	ESR (mΩ) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 105°C, 100KHz 紋波電流
82	820							8 × 12	0.12	574	29	2200
100	101	6.3 × 9.5	0.12	500	32	2900						
150	151							10 × 12	0.12	1050	28	2600
180	181	8 × 12	0.12	900	16	4650						

Cap. 容量 (μF)	WV (V)	50 (1H)					
		Parameter 參數	Case size ØDxL (mm) 尺寸	Dissipation factor (tan δ) 損耗角正切	Leakage current (μA) 漏電流	ESR (mΩ) max. 20°C, 100KHz 阻抗值	Ripple current (mA rms) 105°C, 100KHz 紹波電流
39	390		8 × 12	0.12	390	25	3800
68	680		10 × 12	0.12	680	20	4300

- Taping specifications are given in page 12. 編帶標準請查閱第 12 頁。
- Soldering conditions and recommended land size are given in page 15. 焊接條件及推薦安裝尺寸請查閱第 15 頁。

- Please refer to page 13 for the minimum package quantity. 最小包裝數量請查閱第 13 頁。
- Please refer to page 10 for the Part Number System. 產品編碼規則請查閱第 10 頁。

**Note:** All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

CAT.2019/V1